
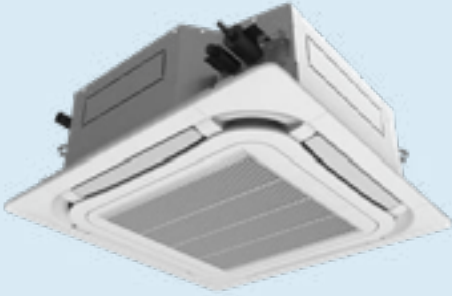



## SUBMITTAL DATA

GMV-ND30T/C-T(U) for use with VRF Outdoor Unit  
30000 BTU/H One Way Cassette Unit

|                  |              |      |
|------------------|--------------|------|
| Job Name         | Location     | Date |
| Purchaser        | Engineer     |      |
| Submitted to     | For          |      |
| Unit Designation | Schedule No. |      |

|   |   |   |
|---|---|---|
|  |  |  |
| YAP1F   | GMV-ND30T/C-T(U)  | XK46 (Optional)   |

### GENERAL FEATURES

- 360° Air Supply
- Independent Swing Control
- Ultra-low noise operation
- DC Quiet Drainage Pump
- Wireless Remote with LCD Display
- Wired Controller Options
- Based on Outdoor Unit Performance
- Coil (Indoor and Outdoor) Copper Tube / Aluminum Fin
- Blue Colored Fin - 500 Hrs Salt Spray Tested

