



Submittal Data:

7,000 to 12,000 BTU/H 115V, 208/230V Cooling Only, Cooling w/ Electric Heating & Heat Pump Models

Job Name	Location	Date:
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction <input type="checkbox"/>	
Unit Designation	Schedule No.	

GENERAL FEATURES

- Industry Standard Size (26" x 15 5/8"), Designed to easily install in most standard wall sleeves. Fits GE AJ Series, Sanyo STB Series, Amana PB Series, etc.
(Contractor must verify)
- Electronic Touch Pad
- IR Remote Control
- LCDI Power Cord
- Condensate Slinger Ring Disposal
- Warranty - <https://www.greecomfort.com/assets/our-products/t2600-ttw/documents/t2600-ttw-limited-warranty.pdf>



Model Number	Capacity (BTU/H)			EER	COP	Dehumidification (Pints/Hr)	Indoor Fan CFM (Hi/Med/Low)
	Cooling	Heating					
		Rev. Cycle	Electric				
Cooling Only Models							
26TTW09AC115V1A	9,300	-	-	9.8	-	2.32	282/258/235
26TTW12AC115V1A	11,800	-	-	9.8	-	3.49	282/258/235
26TTW09AC230V1A	9,100/9,300	-	-	9.8/9.8	-	2.32	282/258/235
26TTW12AC230V1A	11,800/12,000	-	-	9.8/9.8	-	3.49	282/258/235
Cooling with Electric Heat Models							
26TTW09HC230V1A	9,100/9,300	-	9,000/11,000	9.8/9.8	-	2.32	270/247/223
26TTW12HC230V1A	11,800/12,000	-	9,000/11,000	9.8/9.8	-	3.49	270/247/223
Heat Pump Models							
26TTW09HP115V1A	9000	8,500	3,900	9.8	3	2.32	270/247/223
26TTW07HP230V1A	7,200/7,400	6,600/6,800	9,000/11,000	10.6/10.6	3.1/3.1	1.37	270/247/223
26TTW09HP230V1A	9,100/9,300	8,600/8,800	9,000/11,000	9.7/9.7	3.0/3.0	2.32	270/247/223
26TTW12HP230V1A	11,500/11,700	11,200/11,400	9,000/11,000	9.6/9.6	2.9/2.9	3.49	270/247/223

Electrical Specification

Model Number	Voltage	Input Power (Watts)			Current (Amps)		Max Fuse Size	Receptacle Configuration
		Cooling	Elec. Heating	Rev. Cycle	Cooling	Heating		
Cooling Only Models								
26TTW09AC115V1A	115V	950	-	-	8.7	-	15	NEMA 5-15P
26TTW12AC115V1A	115V	1200	-	-	11	-	15	NEMA 5-15P
26TTW09AC230V1A	208/230V	930/950	-	-	4.7/4.3	-	15	NEMA 6-15P
26TTW12AC230V1A	208/230V	1200/1220	-	-	6.1/5.7	-	15	NEMA 6-15P
Cooling with Electric Heat Models								
26TTW09HC230V1A	208/230V	930/950	2900/3500	-	4.7/4.3	15.2/14.0	20	NEMA 6-20P
26TTW12HC230V1A	208/230V	1200/1220	2900/3500	-	6.1/5.7	15.5/14.0	20	NEMA 6-20P
Heat Pump Models								
26TTW09HP115V1A	115V	920	1,150	830	8.4	7.6	15	NEMA 5-15P
26TTW07HP230V1A	208/230V	680/700	2900/3500	620/640	3.5/3.2	3.2/2.9	20	NEMA 6-20P
26TTW09HP230V1A	208/230V	940/960	2900/3500	840/860	4.8/4.4	4.3/4.0	20	NEMA 6-20P
26TTW12HP230V1A	208/230V	1200/1220	2900/3500	1140/1160	6.1/5.6	5.9/5.4	20	NEMA 6-20P


Dimensional Specifications




Receptacle Configuration

Model Number	Voltage	Electric Heater	Amperage	Receptacle Type
Cooling Only Models				
26TTW09AC115V1A	115V	1150	15	A
26TTW12AC115V1A	115V	1150	15	A
26TTW09AC230V1A	208/230V	2900/3500	15	B
26TTW12AC230V1A	208/230V	2900/3500	15	B
Cooling with Electric Heat Models				
26TTW09HC230V1A	208/230V	2900/3500	20	C
26TTW12HC230V1A	208/230V	2900/3500	20	C
Heat Pump Models				
26TTW09HP115V1A	115V	1150	15	A
26TTW07HP230V1A	208/230V	2900/3500	20	C
26TTW09HP230V1A	208/230V	2900/3500	20	C
26TTW12HP230V1A	208/230V	2900/3500	20	C


Receptacle Configurations



A
Parallel
15 Amps, 125 Volts




B
Tandem
15 Amps, 250 Volts



C
Perpendicular
20 Amps, 250 Volts

Accessories

26TTWSLEEVE	Heavy Galvanized Metal Wall Sleeve 26"W x 15-5/8"H x 16-7/8"D - Includes Copper Drain Kit
GRILLES (OPTIONAL)	Stamped Aluminum or Architectural Exterior Grille

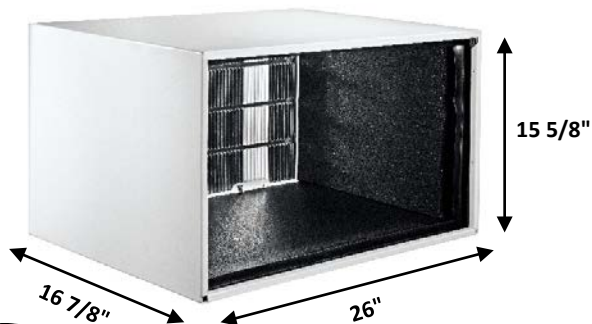

* All Units Meet or Exceed June 1, 2014 DOE Minimums

Specification are subject to change without notice. Manufacturer reserves right to discontinue or modify specification or design without notice or without incurring obligation. All rights reserved.